


SUPER LOCK HOOK PAT.

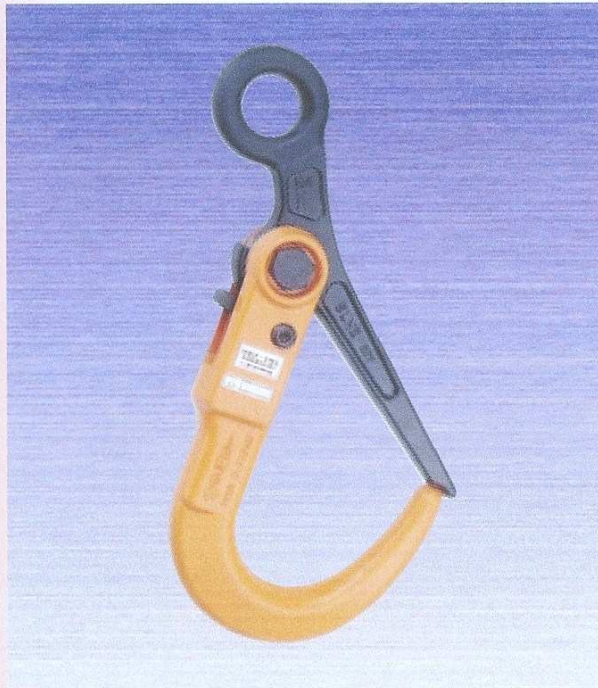


SLH1N~3N

Optimal for lifting of steel decks and using as a safety hook


FEATURES

- This hook is optimal for laying and removing of steel decks, and lifting operation with use of wires or sling belts.
- The wide mouth of the hook is very effective when attaching and detaching the hook from the steel plate.
- When lifted, the lock will automatically close and prevent the hook from coming loose.
- The main body and the shackle are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- The main body is a baked-on finish.


- Laying and removing of steel decks
- As a safety hook for vertical lifting

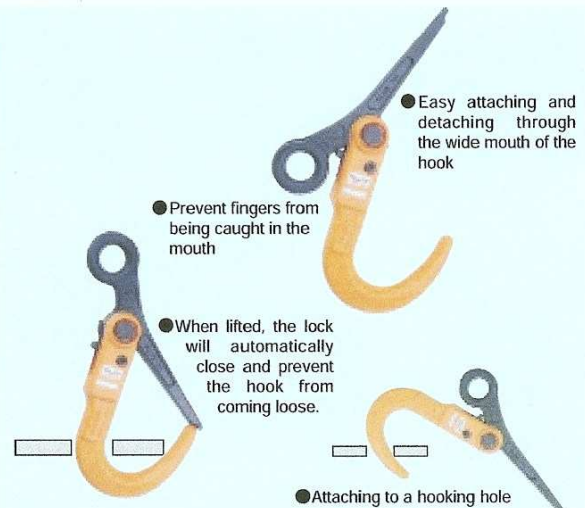

The thickness of the steel plate and the dimensions of the hole must be within the specifications shown in the drawing on the right.



OPERATION INSTRUCTIONS WHEN LIFTING STEEL DECKS

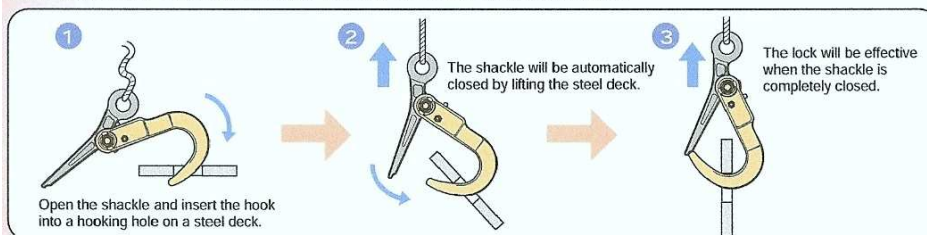

SPECIFICATIONS - DIMENSIONS TABLE

(Unit:mm)

Item No.	Rated capacity (ton)	C	B	b	D	d	H	h1	h2	R	T	t1	t2	t3	Net weight (kg)
SLH 1N	1	80	140	65	56	24	298	210	80	32	48	28	16	28	2.5
SLH 2N	2	96	166	75	64	32	339	236	89	38	54	29	18	29.6	3.2
SLH 3N	3	96	169	78	64	32	339	236	89	38	54	31	18	32.7	3.4

